

MULTI-V®


1 = 10

magafor innovation

90°

MULTI-V


magafor standard

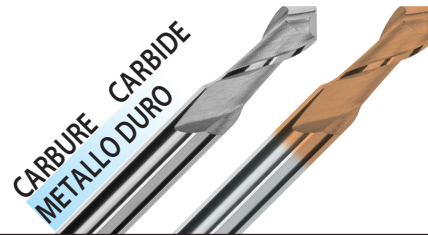

D d9	L	ℓ	d2 h6	T*	MULTI-V 8089	Hard'X 8089-H
3,0	45	6,0	D	0,3	37,59	42,97
4,0	50	8,0	D	0,4	38,67	44,04
5,0	50	10	D	0,5	45,12	50,49
6,0	50	12	D	0,6	50,49	55,86
8,0	70	16	D	0,8	74,12	81,64
10,0	70	18	D	1,0	93,46	105,28

Ø 12 ~ 20 Page Pagina 86

* T = 0,1 x D épaisseur d'âme Web thickness espesor del núcleo spessore del nocciolo

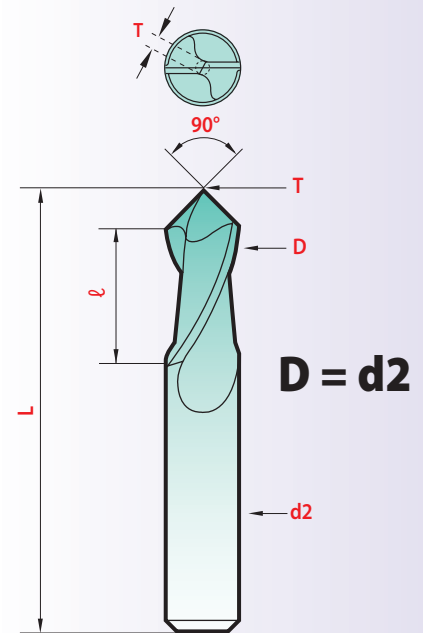


Longs Largas Serie Lunga

90°


MULTI-V

magafor standard

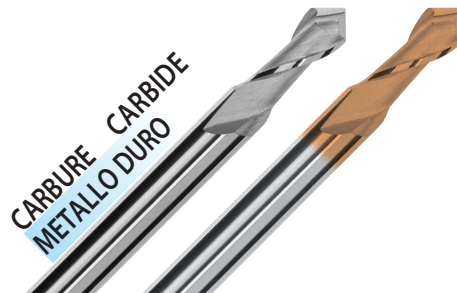

D d9	L	ℓ	d2 h6	T*	MULTI-V 8089-L	Hard'X 8089-LH
3,0	80	12	D	0,3	75,20	78,42
4,0	100	16	D	0,4	85,94	89,16
5,0	120	20	D	0,5	91,31	94,53
6,0	140	24	D	0,6	102,05	106,35
8,0	140	32	D	0,8	123,53	128,91
10,0	170	36	D	1,0	209,48	214,85
12,0	170	40	D	1,2	230,96	239,02
16,0	200	52	D	1,6	402,85	424,33
20,0	200	64	D	2,0	633,81	655,30

* T = 0,1 x D épaisseur d'âme Web thickness espesor del núcleo spessore del nocciolo



Ces series permettent les usinages difficiles d'accès.

These tools allow machining close to side walls.

Estas series permiten realizar mecanizados de difícil acceso.

Queste tipologie consentono le lavorazioni ove sussistono difficoltà di accesso.

Vidéo ou line



www.magafor.com