
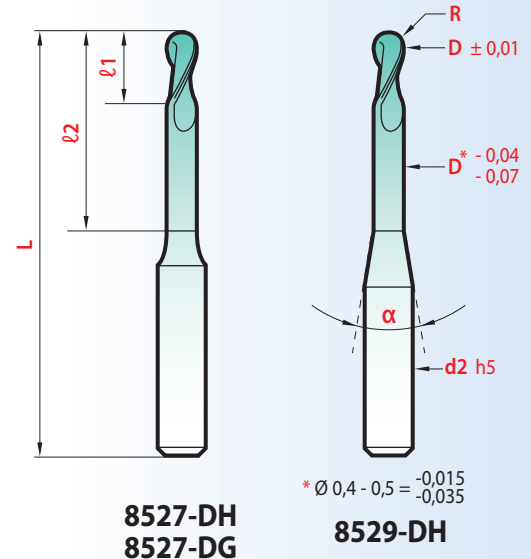


$\ell_1 = 1 \sim 2,5 \times D$

D x ℓ_2	L	ℓ_1	α	d2	R	Hard'X 8527-DH	Graph'X 8527-DG	Hard'X 8529-DH
0,4 x 2	39	0,40		3	0,2	€ 59,08	€ 80,57	€
0,5 x 2	39	0,55		3	0,25	59,08	80,57	
0,5 x 4	39	0,55		3	0,25	59,08	80,57	
0,5 x 6	60	0,55		3	0,25	82,71	104,20	
0,6 x 4	39	0,70		3	0,3	59,08	80,57	
0,6 x 13	39	1,3	40°	3	0,3			66,60
0,6 x 19	39	1,3	40°	3	0,3			68,75
0,8 x 4	39	1,00		3	0,4	59,08	80,57	
0,8 x 6	39	1,00		3	0,4	71,98	93,46	
0,8 x 9	60	1,00		3	0,4	82,71	104,20	
1,0 x 4	39	1,30		3	0,5	59,08	80,57	
1,0 x 6	39	1,30		3	0,5	59,08	80,57	
1,0 x 9	39	1,30		3	0,5	71,98	93,46	
1,0 x 12	60	1,30		3	0,5	82,71	104,20	
1,0 x 14	39	2,8	40°	3	0,5			64,46
1,0 x 19	39	2,8	40°	3	0,5			66,60
1,2 x 6	39	1,60		3	0,6	59,08	80,57	
1,5 x 6	39	2,05		3	0,75	59,08	80,57	
1,5 x 9	39	2,05		3	0,75	71,98	93,46	
1,5 x 12	60	2,05		3	0,75	82,71	104,20	
2,0 x 9	39	2,80		3	1	71,98	93,46	
2,0 x 12	39	2,80		3	1	71,98	93,46	
2,0 x 15	60	2,80		3	1	82,71	104,20	
2,0 x 15	39	4,8	40°	3	1			65,52
2,0 x 21	39	4,8	40°	3	1			67,67
2,5 x 15	60	3,55		3	1,25	82,71	104,20	
2,5 x 15	39	6,8	40°	3	1,25			66,60
2,5 x 21	39	6,8	40°	3	1,25			68,75

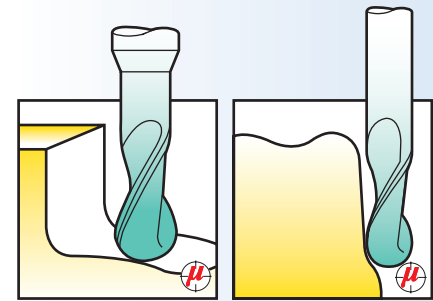

Hard-X
Jusqu'à Up to
Hasta Fino a 67 HRC

magafor, Le choix!
The choice! La elección! La scelta!

Matière Material Materiale	CARBURE CARBIDE METALLO DURO	CARBURE CARBIDE METALLO DURO + Hard'X	CARBURE CARBIDE METALLO DURO + Graph'X
Dureté Hardness Durezza	1800 HV	1800 HV + 8000 HV	1800 HV + 3500 HV
Utilisation Use Utilización Impiego	Production intensive Intensive production Producción intensiva Produzione intensiva	Alliages durs - Aciers trempés Hard alloys - Treated steels Aleaciones duras - Aceros tratados Leghe dure - Acciai temprati	Graphite - Matières abrasives - Céramiques Graphite - Abrasive materials - Ceramics Grafito - Materiales abrasivos - Ceramica Grafite - Materiali abrasivi - Ceramiche